

HJBMX 25 M4 0,09kW Zone 1: FAN (Ex h IIB+H2 T4 Gb) + MOTOR (Ex db IIC T5 Gb) (268263103XD)

GENERAL DATA



ATEX SQUARE WALL PLATE FAN WITH VARIABLE PITCH BLADES

MANUFACTURING FEATURES

- Square plate made of inox steel AISI 304.
- Variable pitch angle PAGAS impeller.
- Supplied with galvanized motor support and protection guard according to the ROHS 2002/95/EC Directive (Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipments).
- ATEX standard asynchronous motor. ATEX certified: II2G Ex d, Standard voltages 230V 50Hz for single phase motors, 230/400V 50Hz for three phase motors. IP55 protection.

APPLICATIONS

Designed for wall assembly, they are suitable for:

- Air renewal in buildings and industries.
- Smoke extraction (max. 60°C).
- General ventilation in closed environments classified as ATEX.
- Working temperature: ambient from -20°C to 60°C

UNDER REQUEST


- 60Hz fans and special voltages.
- Stainless protection grid.

ORGANISM: L.O.M.

CERTIFICAT N°: LOM 17.755X-C

In compliance with the Directive 2014/34/UE


PERFORMANCE CURVE

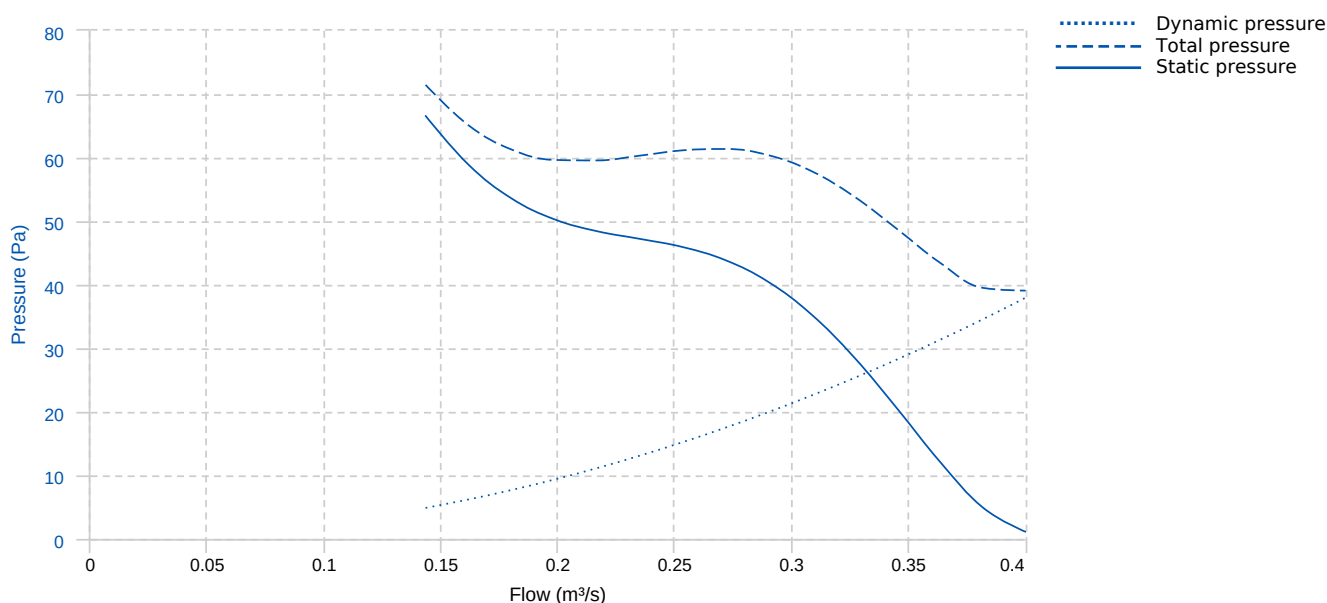

TECHNICAL DATA


Fan							
RPM	1390	Approx. weight	4 kg	Max. Flow	0.4 m³/s		
Motor							
Power	0,09 kW	RPM	1390	I max. (230V)	0,98 A	Size	63
Efficiency (%)	53 %	FP	0.75				

DIMENSIONS

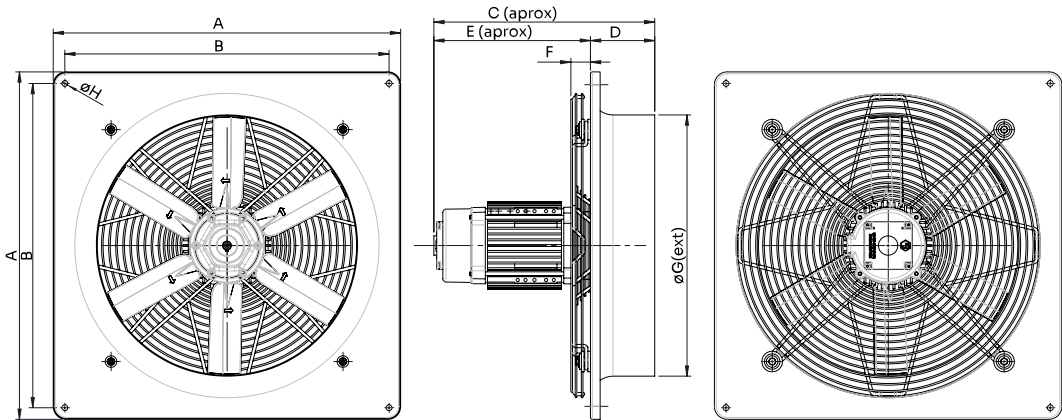

Dimensions (mm)									
A	370	B	320	C	337.5	D	78	E	259.5
F	31.5	G	253	H	7				

WIRING DIAGRAM

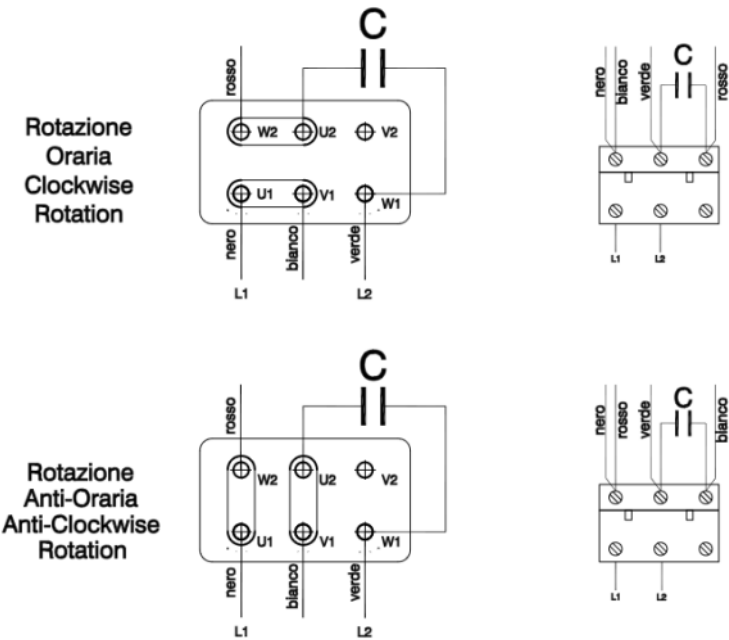

ACCESSORIES




Outlet protection guard for axial fans
RP0 25
REF: 980000025



ATEX SWITCH
INT 16 ATEX
REF: 510200016X

SPARE PARTS

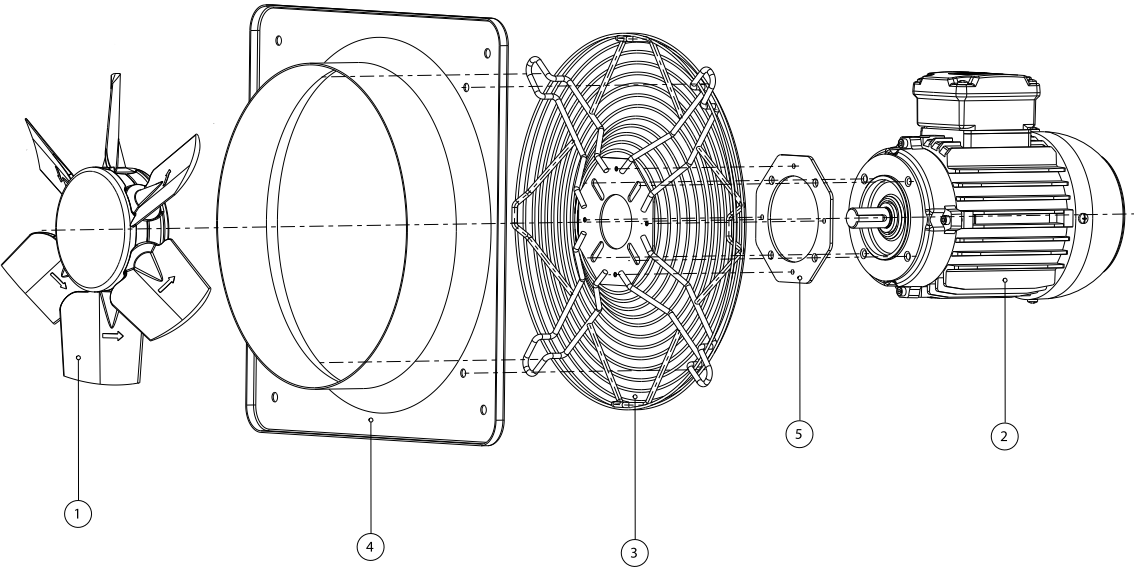

	Code	Model	Qty
2	721601110M051	MOTOR 0,09KW M4 B14	x1