


PRESTUR 351 T4 0,37kW (std) (PS351471)

GENERAL DATA

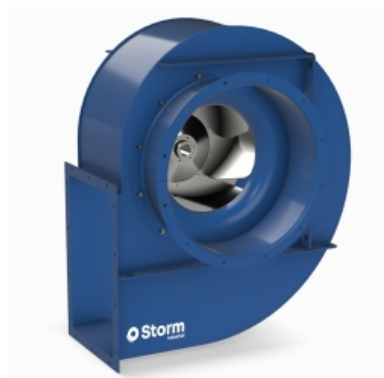

MEDIUM PRESSURE FAN FOR PAINT BOOTHS

MANUFACTURING FEATURES:

- Medium pressure centrifugal fan with direct coupling.
- Reinforced housing made of carbon laminated steel, protected against corrosion by powder coating polyester resin RAL 5010. Finish C3.
- Casing fully latched and adjustable.
- Self-cleaning turbine and reinforced impeller with high-performance backward (reaction) blades made of carbon laminated steel dynamically balanced to minimize noise and vibrations. Black painting RAL 9005
- Squirrel cage standardized asynchronous IEC motor with IP-55 protection and class F electrical insulation. Standard voltages 230/400V 50Hz for three-phase motors up to 4kW and 400/690V50Hz for higher powers.
- Motor with flange (B5), airtight axle
- Double suction flange
- Maximum working temperature in continuous: transported air: 130°C, ambient: 60°C.
- Available positions (to be indicated in case of order): LG and RD
- The indicated codes correspond to the model in position LG

APPLICATIONS


Suitable for moving clean or dusty air. Designed to be fixed in the double suction flange, with the motor in vertical position.

- Paint booths
- Collection of dust
- Food industry dryers
- Food processing
- Incineration
- Odor control in industry
- Indoor / outdoor pollution control
- Big buildings
- Malls
- Factories / Industrial buildings
- Warehouses
- Extraction of smoke
- Boilers and ovens
- Manufacture and treatment of chemical products.
- Tunnels, underground stations.

ON DEMAND

- Fans for special voltages.
- 2 speed motor.
- C4 or C5 coating painting
- Hot dip galvanized
- Inox 304 (normal or electropolished finish)
- Inox 316 (normal or electropolished finish)
- Cooling wheel
- Anticaloric paint
- Fully welded housing (waterproof)
- Inspection door to facilitate maintenance and cleaning
- Drain plug.
- Non-sparking air passage and standard motor
- Other brands of motors.

PERFORMANCE CURVE

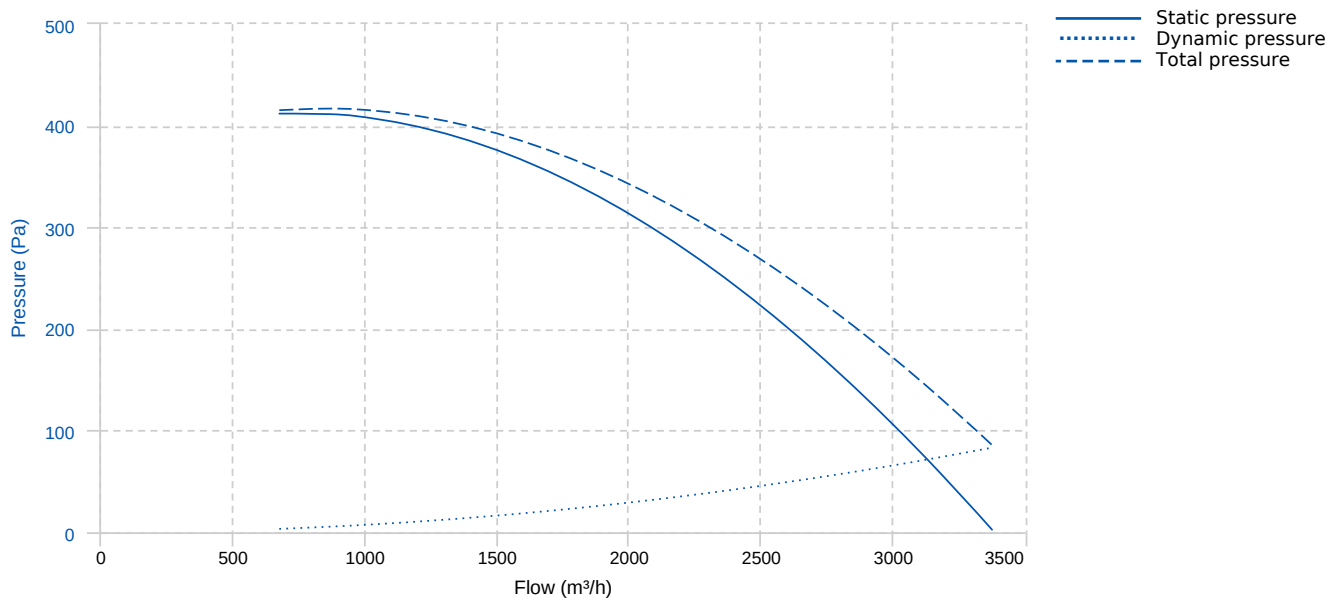


TECHNICAL DATA

Fan							
RPM	1370	Approx. weight	66.2 kg	Max. Flow	3380 m³/h		
Motor							
Power	0,37 kW	RPM	1370	I max. (230V)	1,86 A	I max. (400V)	1,07 A
Size	71	Approx. weight	6.2 kg	Efficiency (%)	69.5 %		


ERP DATA

Fan data sheet		
Fan type	Centrifugal fan backward blades with casing	
Installation category	A: Outlet and Inlet free discharge	
Efficiency category	Static	
The fan has to be installed with VF	No	
Motor power (kW)	0.37	
	Fan values	ERP Requirements 2015
Max. efficiency (%)	53.17	45.46
Efficiency grade (N)	68.71	61
Pabs (kW)	0.331	
Flow (m³/h)	1936.93	
Static pressure (Pa)	322.75	
Speed (m/s)	1370	

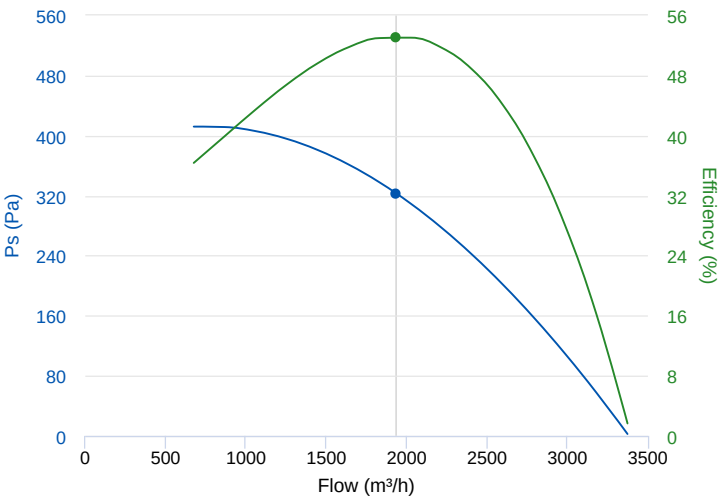


	Fan values	ERP Requirements 2015
Specific ratio	1.00	

DIMENSIONS

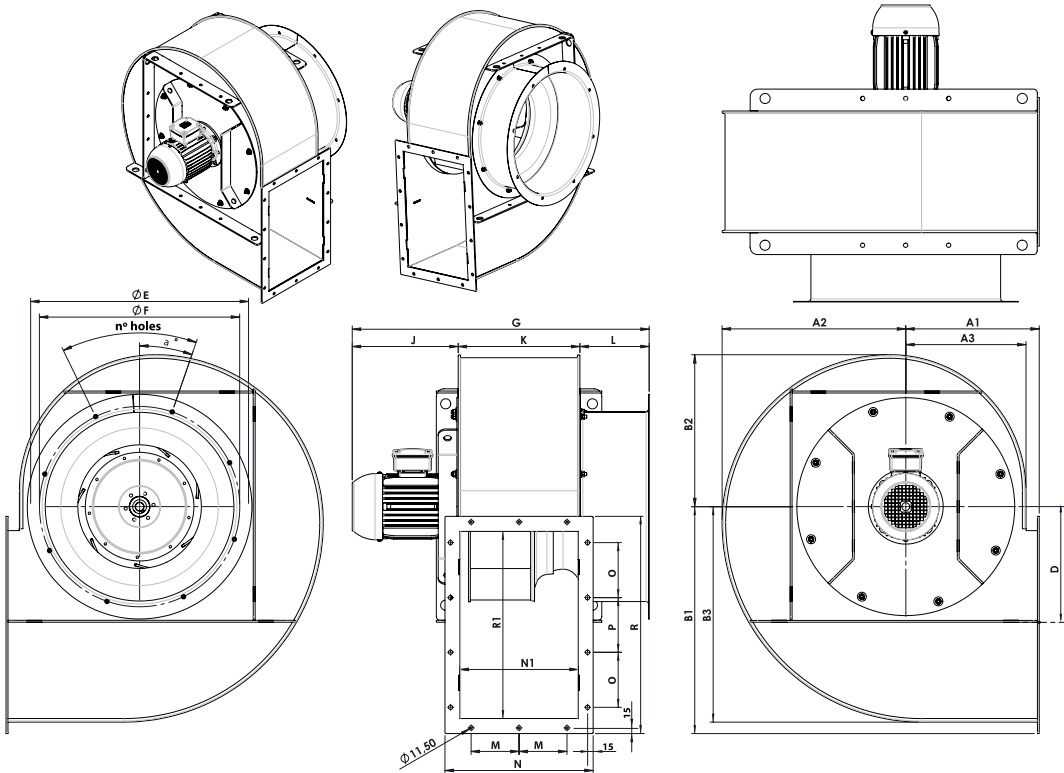

Dimensions (mm)									
A1	266.2	A2	351.1	A3	230.7	B1	441.8	B2	290.9
B3	411.3	D	224.3	E	418	F	395	G	636.5
J	218.5	K	233	L	185	M	92	N	304
N1	224	O	105	P	105	R	435	R1	355
aº	22,5º	nºholes	8x45º						

WIRING DIAGRAM

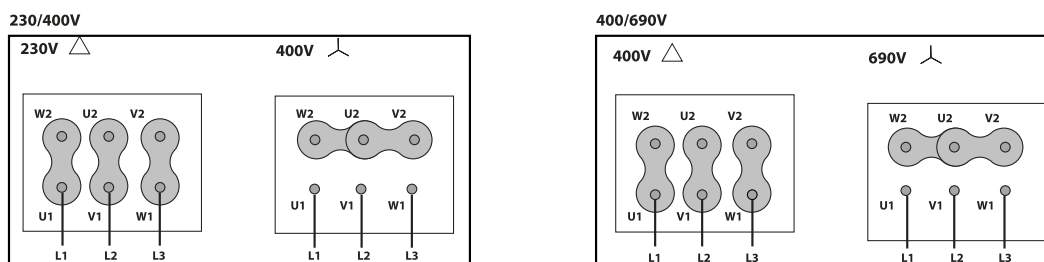

ACCESSORIES



SAFETY SWITCH
INT 25 3P A
REF: INT253PA




CONNECTION FLANGE
AC 350
REF: 960003211



ANTI-VIBRATION JOINT
JE 45
REF: 300719201



CIRCULAR-CIRCULAR ANTI-VIBRATION FLANGE FOR STORM
BADS 350
REF: BADS-3535



OUTLET BEND FOR STORM FANS
CPS 355x224-350
REF: CPS-3522435



FREQUENCY SPEED CONTROLLER
SFC 230 I 2,5A *
REF: SFC230I003



ANTI-VIBRATION RUBBER BLOCK
AVR (GENERIC)



INLET PROTECTION GUARD FOR CENTRIFUGAL FANS
RA 35/14
REF: A-253481901



ANTI-VIBRATING FLANGE 400°/2H
BA-400 35
REF: 960002053



OUTLET FLANGE FOR STORM MODELS
EIS 355x224-350
REF: EIS-3522435



OUTLET PROTECTION GUARD FOR STORM FANS
RIS 355x224
REF: RIS-35224E2



RECTANGULAR-RECTANGULAR ANTI-VIBRATION FLANGE FOR STORM
BIDS 224x355-200
REF: BIDS-35224



FREQUENCY SPEED CONTROLLER
SFC 400 III 1,2A *
REF: SFC400III1



ANTI-VIBRATION SPRING BLOCK
AVS (GENERIC)



**ACOUSTIC CABINS FOR CENTRIFUGAL FANS
AB (GENERIC)**

SPARE PARTS

	Code	Model	Qty
1	R-BAD-N35	INLET CONE 355	x1
2	721001139	MOTOR 0,55kW T4 B5 230/400V	x1
3	721001134	MOTOR 0,37kW T4 B5 230/400V	x1